

MODELLING AND SIMULATION OF STEERING GEAR SYSTEM

RR PAVAN KUMAR ^[1], C NAGAMANI ^[2], R HARI KRISHNA ^[3]

Dept Of Mech,

Nagole Institute of Technology & Science, Hyderabad, Telangana

Abstract

Rack and pinion steering systems are commonly used due to their simplicity in construction and compactness. The main purpose of this paper is to design and manufacture manual rack and manual pinion steering system according to the requirement of the vehicle for better manoeuvrability. Quantities like turning circle radius, steering ratio, steering effort, etc. are interdependent on each other and therefore there are different design consideration according to the type of vehicle. The comparison of result is shown using tables which will help to design an effective steering for the vehicle. A virtual rack and pinion assembly can be created using software's like CATIA V5 R20 and ANSYS.

1. INTRODUCTION

Steering is the term applied to the collection of components, linkages, etc. which will allow a vessel (ship or Boat) or vehicle to follow the desired course. An exception is the case of rail transport by

which rail tracks combined together with railroad switches provide steering column, which may contain universal joints, to allow it to deviate somewhat from a straight line. The most conventional steering arrangement is to turn the front wheels using a hand-operated steering wheel which is positioned in front of the driver. The steering system acts a significant role of making car convenient to handle and enhance the vehicle stability. In the past one hundred years, the development of steering system has experienced many stages, and the Steer-by-Wire system (SBW) is the newest technology of steering system for passenger cars. But the Steer-by-Wire system has not yet accepted by public consumers and permitted by state regulations, in consideration of the reliability and safety of the system.

The steering system of a vehicle allows the driver to control the direction of the vehicle through a system of gears and linkages that connects the steering wheel with the front wheels. Steering Systems -

Introduction The steering system must perform these functions:

- Change direction of vehicle.
- Provide a degree of 'feel' of the road for the driver.
- Not transmit excessive shock back to the driver due to an uneven road.
- Not cause excessive tire wear.

The most conventional steering arrangement is to turn the front wheels using a hand-operated

steering wheel which is positioned in front of the driver, via the steering column, which may contain universal joints (which may also be part of the collapsible steering column design), to allow it to deviate somewhat from a straight line.

1.1 CONVENTIONAL STEERING SYSTEM

In this steering system, only the front wheels are steered towards right or left according to the requirement because at the rear their dead axle is present.

1.2 FOUR WHEEL STEERING SYSTEM

In this steering system, the all four wheels are to be steered according to the steer perform to drive towards left or right. Four-wheel steering, also called rear-wheel steering or all-wheel steering, provides a


means to actively steer the rear wheels during turning manoeuvres. It should not be confused with four-wheel drive in which all four wheels of a vehicle are powered. It improves handling and helps the vehicle make tighter turns. Production-built cars tend to understeer or, in few instances, oversteer. If a car could automatically compensate for an understeer/oversteer problem, the driver would enjoy nearly neutral steering under varying conditions.

In most active four-wheel steering system, the rear wheels are steered by a computer and actuators, the rear wheels generally cannot turn as far as the front wheels. Some systems including Delphi's QuadraSteer and the system in Honda's Prelude line allow the rear wheels to be steered in the opposite direction as the front wheels during low speeds. This allows the vehicle to turn in a significantly smaller radius sometimes critical for large trucks or tractors and vehicles with trailers.

1.3 ACKERMAN STEERING SYSTEM

According to Ackermann Steering geometry, the outer wheels move faster than the inner wheels, therefore, the equation for correct steering is:

$$\cot \Phi - \cot \theta = b / l$$

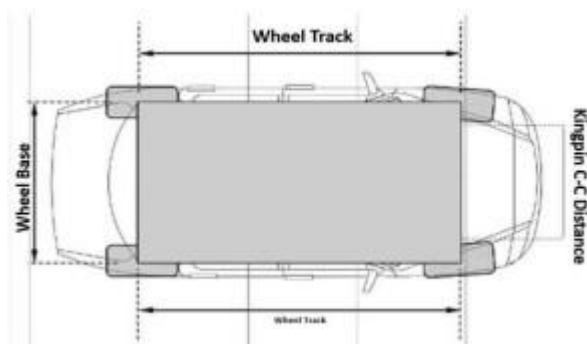

In the image shown below,

Φ = outer wheel angle

θ = inner wheel angle

b = track width

L = wheelbase

α = Ackermann angle

2. LITERATURE REVIEW

Rudolph Ackermann invented the steering mechanism allowing the vehicle to turn along the flow of the path in early 1880 s, called as Ackermann steering. The parallelogram steering mechanism was developed in late 1880 s. The major studies performed on the steering mechanisms and steering geometry optimizations are

Sr.No	Author	Work	Year
1.	Hardikkumar Gadher, Tejashkumar Patel, Chirag Modi	Zeel Bhojani Chandubhai S Patel Institute of Technology, CHARUSAT, Gujarat, India.	2017
2.	Mohammad Kristamto	"Measuring geometric and kinematic properties to design steering axis to angle turn of the electric golf car.", International Conference on Sustainable Energy Engineering and Application.	2015
3.	R.S. Khurmi, J.K. Gupta	"Theory of Machines", S Chand & Company Pvt. Ltd., Vol 1, 14th Edition,	2014
4.	S.K. Gupta	"A Textbook of Automobile Engineering", S. Chand & Company Pvt. Ltd., Vol 1, 1st Edition,	2014
5.	Saket Bhishikar, Vatsal Gudhka, Neel Dalal, Paarth Mehta, Sunil Bhil, A.C. Mehta	"Design and Simulation of 4 Wheel Steering System", International Journal of Engineering and Innovative Technology (IJEIT), Volume 3, Issue 12,	June 2014
6.	Dr. Kirpal Singh	"Automobile Engineering", Volume 1,	2013

3. MATERIALS SELECTION

The materials used in the steering system target precise operation and light weight components. Although precision and weight are the top priorities, cost, manufactureability, and reliability were also considered. Precision in the steering system is derived from high manufacturing tolerances and minimal deflection. Deflection in any component leads to steer compliance, resulting in an

unresponsive steering system. The pinion and idler gears were purchased, which limited material options but reduced manufacturing time. Although these gears are steel, they have a smaller face width than a comparable aluminium gear. The rack gear is Turned, Ground and Polished (TGP) 1042 carbon steel rod [4]. The TGP material is more precise than standard round stock and the TGP finish removes surface tension inherent from standard extruding. This reduced the risk of the rack gear bending when the gear teeth were cut. The higher strength of the steel also allowed for extra material to be removed without introducing steer compliance. In addition to the precise material, the steel on steel gear mesh is advantageous for reliability. A softer material in the gear mesh would increase the possibility of galling, and compromise precision over time.

3.1 MECHANICAL PROPERTIES FOR HEAT TREATMENT PROCESSES

Forging

Pre heat carefully, then raise temperature to 850-1200°C for forging. Do not forge below 850°C. After forging cool slowly in air.

Annealing

Heat the EN19T slowly to 680-700°C. Cool in air.

Hardening

This steel grade is commonly supplied ready heat treated. If further heat treatment is required annealed EN19 should be heated slowly to 860-890°C and after adequate soaking at this temperature quench in oil. Temper as soon as tools reach room temperature.

Tempering

Heat carefully to a suitable temperature selected by reference to a tempering chart or table. Soak at the temperature for 2 hours per 25mm of ruling section, and then allow to cool in air. Tempering between 250-375°C is not advised as tempering within this range will reduce the impact value.

Heat Treatment

Heat treatment temperatures, including rate of heating, cooling and soaking times will vary due to factors such as the shape and size of each steel component. Other considerations during the heat treatment process include the type of furnace, quenching medium and work piece transfer facilities. Please consult your heat treatment provider for full guidance on heat treatment of EN19T alloy steel.

4. CALCULATIONS

The geometry validation was done by performing the analytical treatment. The concept of reverse engineering was applied in order to validate the designed geometry. The following calculations were performed in order to validate the geometry:

Required conditions are:

4.1 ACKERMANN GEOMETRY

Angle of inside lock (θ) = 30° According to Ackermann Geometry for perfect steering is given by:

$$\begin{aligned} \cot \Phi - \cot \theta &= b / l \\ \cot \Phi &= \cot \theta + b / l \\ \cot \Phi &= \cot (30) + 1260 / 2032 \end{aligned}$$

Hence rearranging and substituting values in above equation;

$$(\Phi) = 23.02^\circ$$

Also, Inner Turning Radius,

$$(R_{if}) = l / \sin \theta = 2032 / \sin (30)$$


$$(R_{if}) = 4064 \text{ mm}$$

Outer Turning Radius,

$$(R_{of}) = l / \sin \Phi = 2032 / \sin (23.02)$$

$$(R_{of}) = 5196.2 \text{ mm}$$

Hence by comparing both graphical and analytical data we can conclude that the both values are converging thus, the system design is accurate.

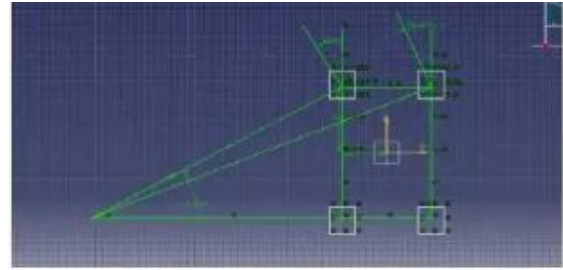

CATIA Model of Steering Angle
Geometry

4.2 SELECTION OF GEAR TOOTH PROFILE

A gear tooth profile was selected based on BIS (Bureau of Indian Standard) recommendation and the manufacturability. A 20° full depth involute profile system was selected because of the following advantages:

It reduces the risk of undercutting. It reduces the interference.

Due to increase in pressure angle, the tooth becomes slightly broader at the root this makes the tooth stronger and increases its load carrying capacity. It provides better length of contact. The properties of teeth of 20° full depth involute profile system are as follow:

Minimum number of teeth on pinion:

The minimum number of teeth required on pinion in order to avoid the interference was computed using following relation:

$$Z_p = 2h_a / m \cdot \sin^2 \Phi$$

Substituting values in above equation;

$$Z_p = 2ha/m.\sin^2\Phi$$

$$= 2/ \sin^2\Phi$$

$$Z_p = 17.09 = 18$$

Hence minimum numbers of teeth on pinion are: 18. Some other details of gear teeth profile are given below,

- Module = 2
- 20° full depth involute system $\phi = 20^\circ$
- Addendum = $h_a = 1m = 2mm$
- Dedendum = $h_f = 1.25m = 2.5mm$
- Clearance = $C = 0.25m = 0.5mm$
- Working Depth = $2m = 4mm$
- Whole Depth = $2.25m = 4.5mm$
- Tooth thickness = $1.5708m = 3.14mm$

4.3 STEERING RATIO

The steering ratio is the ratio of how much the steering wheel turns in degrees to how much the wheel turns in degrees. Approximating maximum turn to be of 25 degrees and steering wheel movement to be 180 degrees the steering ratio can be calculated as, $S.R = 180/25 = 7.2$

4.4 RACK TRAVEL

Once the steering ratio has been calculated the rack travel needs to be decided.

The steering wheel decided is AIM Formula steering wheel 2 which has a radius of 130 mm.

The steering wheel travel for one complete rotation,

$$= 2\pi \times r$$

$$= 0.6911m$$

Considering maximum steer angle and max rack travel is reached at complete rotation of the steering wheel. The steering ratio can be equated to steering wheel travel/rack travel

$$7.2 = 0.6911 / \text{Rack travel}$$

Rack travel = 95.98 mm Therefore, required rack travel is around 96 mm

4.5 RACK POSITION

The rack can have two positions. It can either be in front of the front wheel center line or behind it. If the rack is placed forward of the front axle line it can be mounted easily on the frame giving wide range for choice of heights. However, this arrangement makes it difficult to have the steering rack, track rods and steering arms in a straight line which is required if Ackermann geometry is a goal for steering design. Fixing the rack behind the axle line is better from both a geometrical and packaging viewpoint. Hence it is decided to have the rack positioned behind the front axle line i.e. a rear steer is chosen.

5. DESIGN AND ANALYSIS

We are using rack and pinion mechanism because of obvious advantages of reduced complexity; ease of construction and less space requirement compare to other steering mechanisms. The analytical steps involved in designing if rack and pinion systems are as follow:

5.1 CAD MODEL OF RACK AND PINION

We have designed complete assembly of rack and pinion in SOLIDWORKS 2015, the complete design of rack and pinion and its assembly in SOLIDWORKS 2015 is shown below: Fig.



Cad model of Rack and Pinion in SOLIDWORKS

5.2 ANALYSIS OF COMPONENTS

Analysis is process of analysing the components by applying load, temperature, pressure etc. and obtaining the values such as stresses (bending, tangential and normal), deformations, safety factor etc. in order to determine the safety of the components when done in practical. These

Analyses gives optimum result of safety of components and minimize the chances of failure. Three major analyses of rack and pinion on Ansys 15.0 are carried out here:

- 1) Total Deformation
- 2) Equivalent Stress
- 3) Factor of Safety

Material Type:

EN 19 Alloy Steel

1) Total Deformation

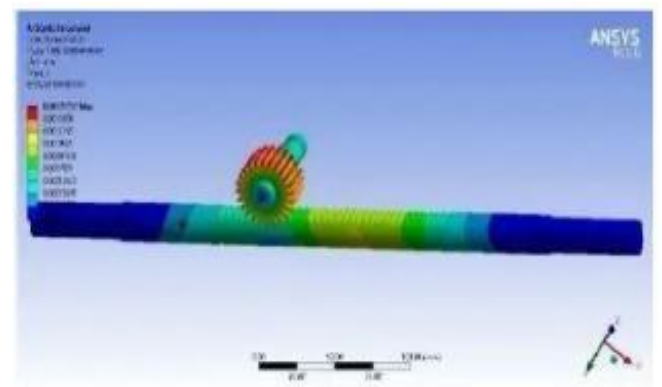


Fig. Total Deformation in Rack and Pinion

2) Factor of Safety

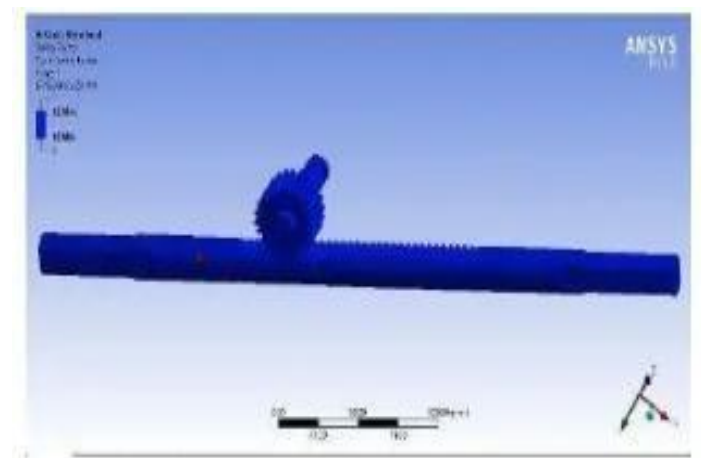


Fig. Factor of Safety in Rack and Pinion

3) Equivalent Stress

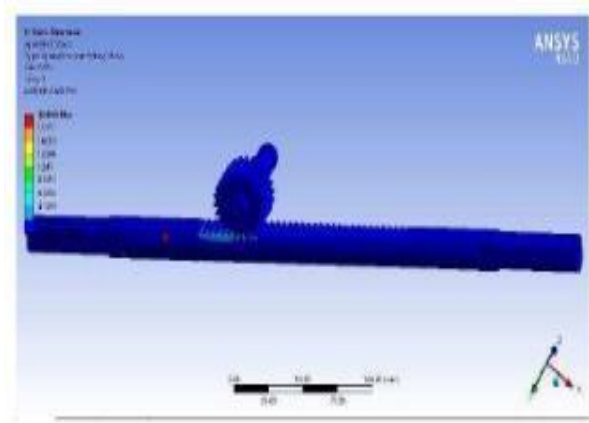


Fig. Stresses Generated in Rack and Pinion

6. CONCLUSION

To improve the steering geometry i.e. Ackerman geometry, which helps the driver to avoid the negative effect of cornering forces acting on the vehicle & increases the space in cockpit area and the comfort of driver. Steering geometry can be optimized by using mathematical model for

Ackerman condition for different inner wheel angles and select geometry for which percentage Ackermann as well steering effort is optimum. The composite material increases the strength of rack & pinion & reduces the weight of system which helps to reduce gross weight of vehicle. The weight Composite Material is reduced as compared to others material which is turn result in improved power transmission which overall improve the efficiency of the system.

7. REFERENCES

- [1] Reza N. Jazar Vehicle Dynamics: Theory and Applications Springer 2008.
- [2] Bhushan Akhare¹, Sanjeev S Chouhan², Performance & Value Analysis of Power Steering System, ISSN 2250-2459, Volume 2, Issue 8, August 2012.
- [3] Dipalkumar Koladia Mathematical Model to Design Rack and Pinion Ackerman Steering Geometry, International Journal of Scientific & Engineering Research, Volume 5, Issue9, September-2014 ISSN 2229-5518.
- [4] Analysis of Mechanical Properties of En19 Steel Used in rack and pinion, N.V Diwakar, C. Bhagyanathan and J. DavidRathnaraj Manufacturing Engineering Department, SriRamakrishna Engineering College, Coimbatore.
- [5] Deep Srivastava Designing of All Terrain Vehicle (ATV), International Journal of Scientific and Research Publications, Volume 4, Issue 12, December 2014 ISSN 2250-3153.